


Luminaire

Code 2030030APP_W
Name DISCOVERY SPACE SQUARE SPOT TW APP NRO - WARM


Measurement

Code FTS2200258
Name DISCOVERY SPACE SQUARE SPOT TW APP NRO - WARM

Luminaire Flux	2581 lm	Luminaire Power	42.0 W	Efficacy	61.441 lm/W	Efficiency	100.00%
Source Flux	2581 lm	Maximum value	155.79 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m2		Emitting area on Plane 180°	0.009000 m2		
Emitting area on Plane 0°		0.009000 m2		Emitting area on Plane 270°	0.009000 m2		
Emitting area on Plane 90°		0.009000 m2		Glare area at 76°	0.204689 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		13-10-2022		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	2581 lm		
LED Flux=4527lm LED Power=37W Eff=57% EfcLed=122lm/W EfcLum=61lm/W CCT=2700K Ra=80 L70(6K)=60000h							
C.I.E.	42 73 92 51 100			D DIN 5040	C31		
F UTE	0.51 G + 0.49 T			B NBN	BZ 5		

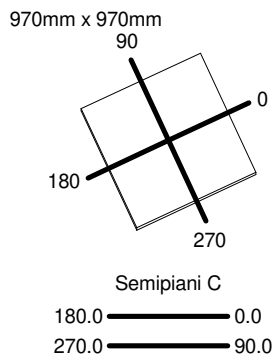

ULOR 48.85 %
DLOR 51.15 %
RN 48.85 %

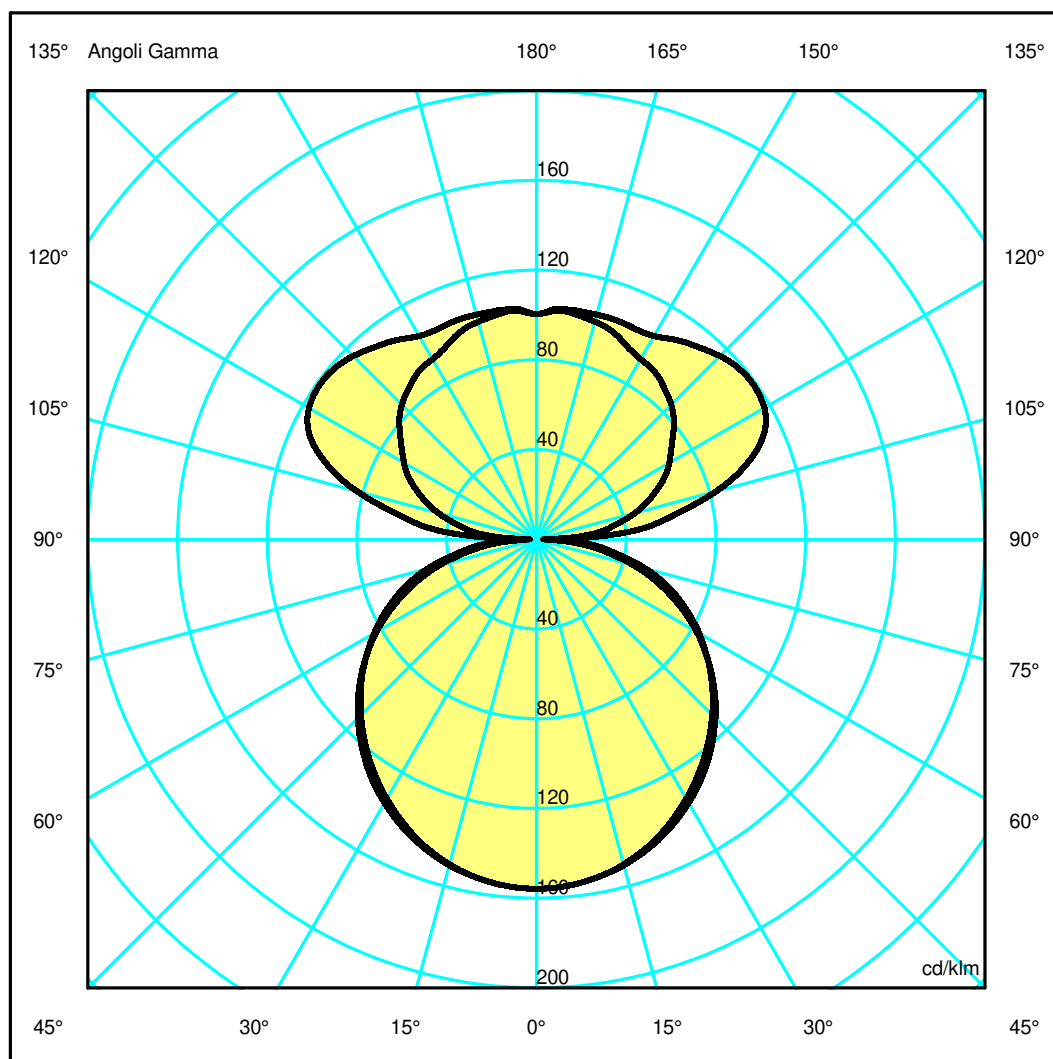

Luminaire

Code 2030030APP_W
Name DISCOVERY SPACE SQUARE SPOT TW APP NRO - WARM

Measurment


Code FTS2200258
Name DISCOVERY SPACE SQUARE SPOT TW APP NRO - WARM

Luminaire Flux	2581 lm	Luminaire Power	42.0 W	Efficacy	61.441 lm/W	Efficiency	100.00%
Source Flux	2581 lm	Maximum value	155.79 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m2		Emitting area on Plane 180°		0.009000 m2	
Emitting area on Plane 0°		0.009000 m2		Emitting area on Plane 270°		0.009000 m2	
Emitting area on Plane 90°		0.009000 m2		Glare area at 76°		0.204689 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		13-10-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2581 lm	
LED Flux=4527lm LED Power=37W Eff=57% EfcLed=122lm/W EfcLum=61lm/W CCT=2700K Ra=80 L70(6K)=60000h							
C.I.E.	42 73 92 51 100			D DIN 5040	C31		
F UTE	0.51 G + 0.49 T			B NBN	BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.88	3.76	5.63	7.51	9.39	OC	1.95	3.91	5.86	7.81	9.76
OB	1.88	3.76	5.63	7.51	9.39	OD	1.95	3.91	5.86	7.81	9.76

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	402.03	400.12	387.99	365.17	332.65	290.91	240.49	182.22	116.27	44.84
OB	402.03	400.12	387.99	365.17	332.65	290.91	240.49	182.22	116.27	44.84
OC	402.03	400.14	387.01	361.11	326.34	285.73	240.33	189.84	129.76	60.46
OD	402.03	400.14	387.01	361.11	326.34	285.73	240.33	189.84	129.76	60.46

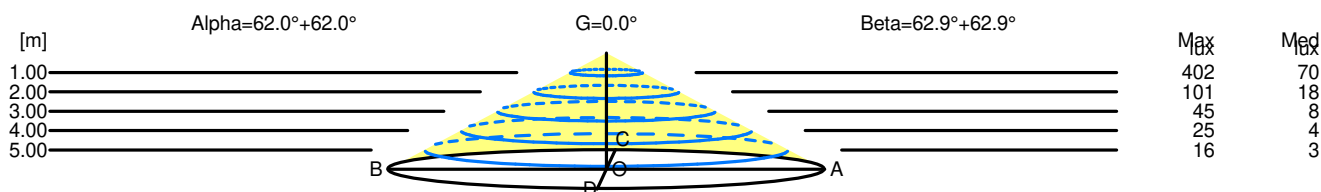

H[m]	D[m]	Max lux	Med lux	Alpha=62.0°+62.0°	G=0.0
1.00	3.76	402	70		
2.00	7.51	101	18		
3.00	11.27	45	8		
4.00	15.02	25	4		
5.00	18.78	16	3		

H[m]	D[m]	Max lux	Med lux	Beta=62.9°+62.9°	G=0.0
1.00	3.91	402	70		
2.00	7.81	101	18		
3.00	11.72	45	8		
4.00	15.62	25	4		
5.00	19.53	16	3		