

Luminaire

Code TB03122
Name VECTOR 20 TRK12 940 SP TITAN.

Measurum.

Code FTS2102431
Name VECTOR 20 TRK12 940 SP TITAN.

Luminaire Flux	184 lm	Luminaire Power	3.0 W	Efficacy	61.457 lm/W	Efficiency	100.00%
Source Flux	184 lm	Maximum value	11314.21 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	20 mm	Height	50 mm		
Round Luminous Area		Diam.	15 mm	Height	0 mm		
Horizontal Luminous Area		0.000177 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000043 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		09-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		184 lm	
LED Flux=218lm LED Power=1.9W Eff=85% EfcLed=115lm/W EfcLum=61lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=36000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=20mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

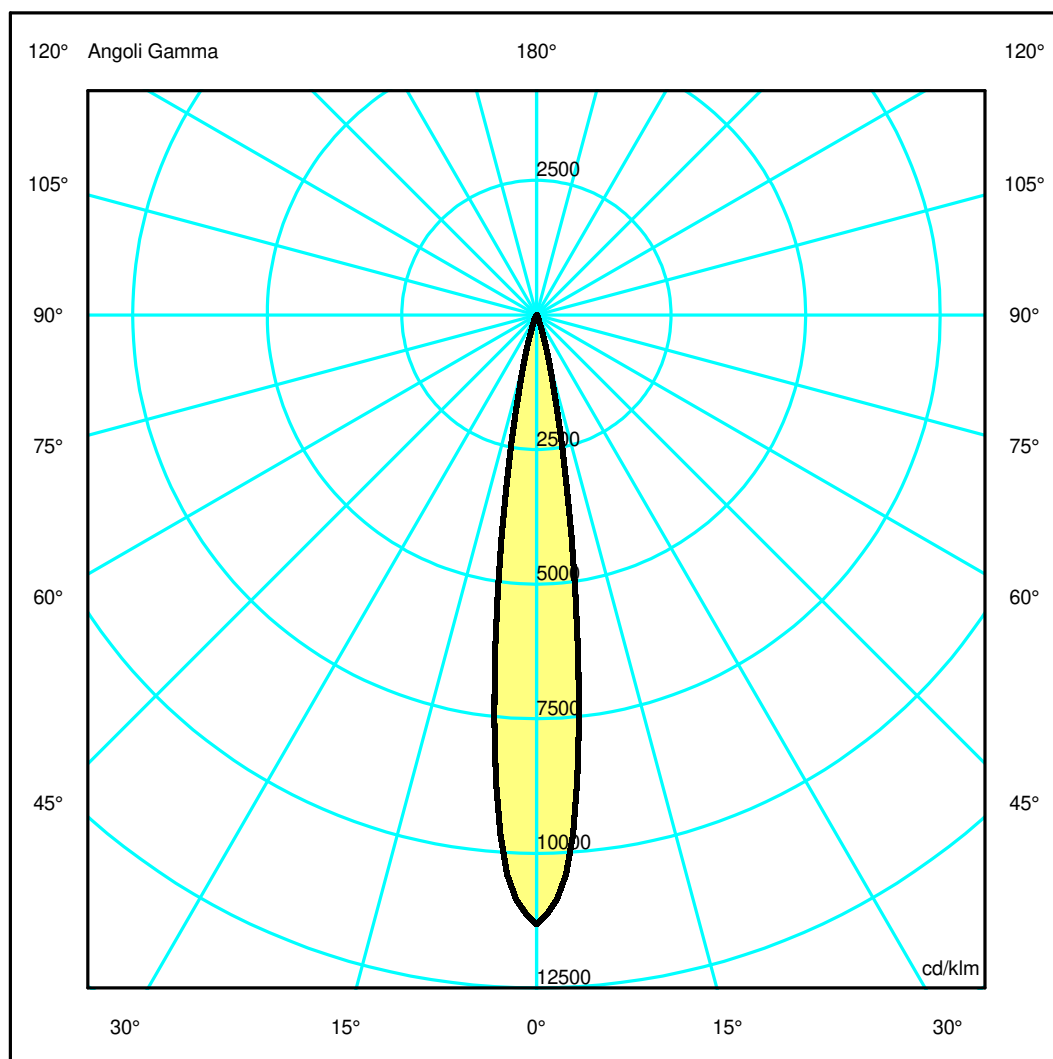

Luminaire

Code TB03122
Name VECTOR 20 TRK12 940 SP TITAN.

Measurerm.


Code FTS2102431
Name VECTOR 20 TRK12 940 SP TITAN.

Luminaire Flux	184 lm	Luminaire Power	3.0 W	Efficacy	61.457 lm/W	Efficiency	100.00%
Source Flux	184 lm	Maximum value	11314.21 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	20 mm	Height	50 mm		
Round Luminous Area		Diam.	15 mm	Height	0 mm		
Horizontal Luminous Area		0.000177 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000043 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		09-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		184 lm	
LED Flux=218lm LED Power=1.9W Eff=85% EfcLed=115lm/W EfcLum=61lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=36000h							
C.I.E.	99 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.13	0.27	0.40	0.53	0.67	OC	0.13	0.27	0.40	0.53	0.67
OB	0.13	0.27	0.40	0.53	0.67	OD	0.13	0.27	0.40	0.53	0.67

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2086.00	1601.94	171.00	17.35	5.61	1.57	0.46	0.10	0.00	0.00
OB	2086.00	1601.94	171.00	17.35	5.61	1.57	0.46	0.10	0.00	0.00
OC	2086.00	1601.94	171.00	17.35	5.61	1.57	0.46	0.10	0.00	0.00
OD	2086.00	1601.94	171.00	17.35	5.61	1.57	0.46	0.10	0.00	0.00

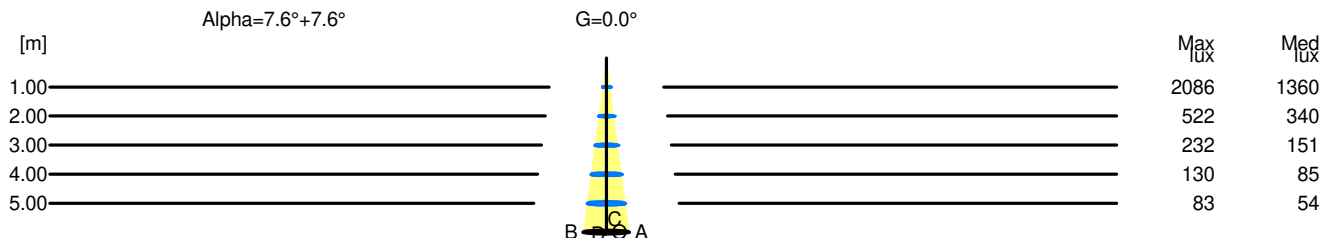

H[m]	D[m]	Max lux	Med lux	Alpha=7.6°+7.6°	G=0.0
1.00	0.27	2086	1360		
2.00	0.53	522	340		
3.00	0.80	232	151		
4.00	1.07	130	85		
5.00	1.33	83	54		