

Luminaire

Code TC40104
Name GOPLE 80 PENDANT TRK12 927 SP BLACK

Measurerm.

Code FTS2200220
Name GOPLE 80 PENDANT TRK12 927 SP BLACK

Luminaire Flux	1698 lm	Luminaire Power	24.0 W	Efficacy	70.735 lm/W	Efficiency	100.00%
Source Flux	1698 lm	Maximum value	8894.53 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1698 lm	
LED Flux=2339lm LED Power=22W Eff=73% EfcLed=108lm/W EfcLum=71lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


Diam=77mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

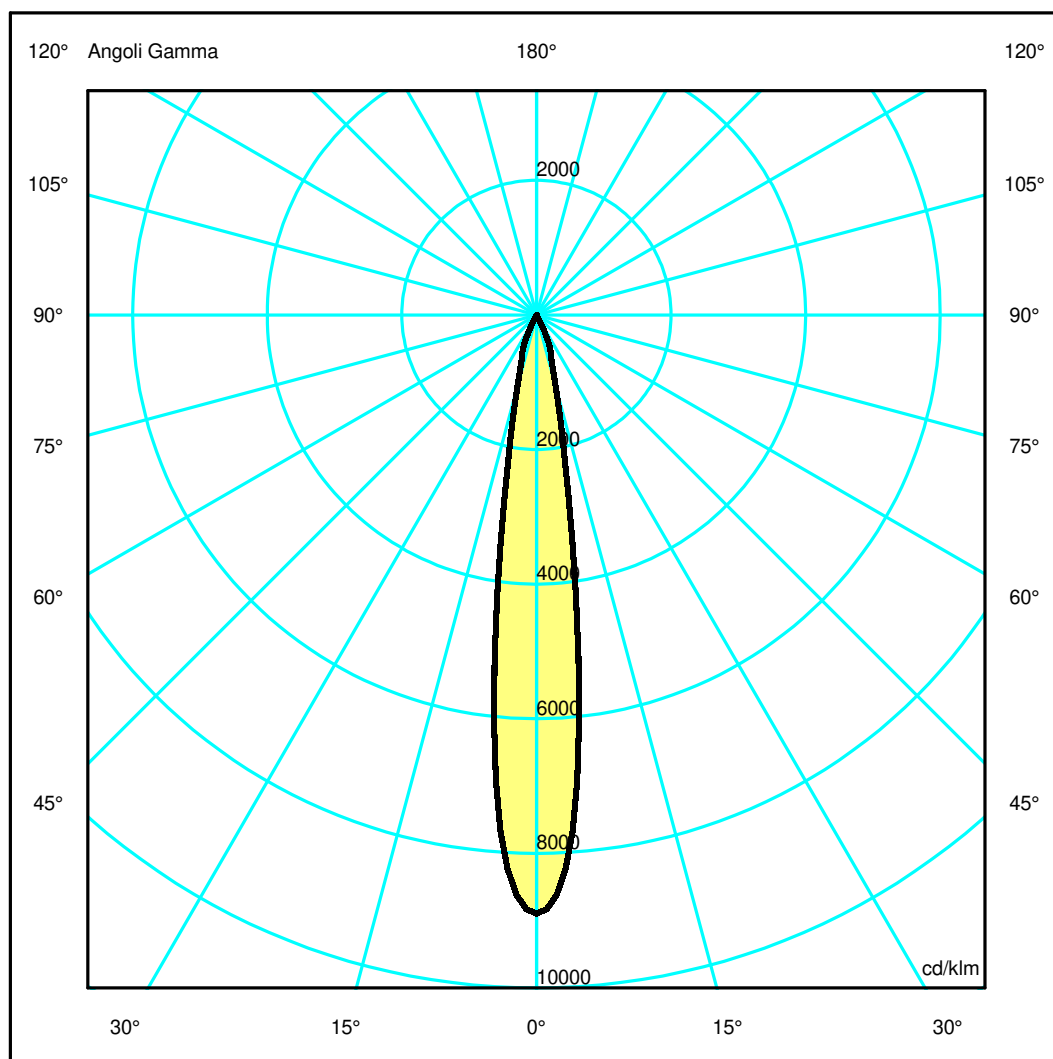

Luminaire

Code TC40104
Name GOPLE 80 PENDANT TRK12 927 SP BLACK

Measurerm.


Code FTS2200220
Name GOPLE 80 PENDANT TRK12 927 SP BLACK

Luminaire Flux	1698 lm	Luminaire Power	24.0 W	Efficacy	70.735 lm/W	Efficiency	100.00%
Source Flux	1698 lm	Maximum value	8894.53 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1698 lm	
LED Flux=2339lm LED Power=22W Eff=73% EfcLed=108lm/W EfcLum=71lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.14	0.27	0.41	0.54	0.68	OC	0.14	0.27	0.41	0.54	0.68
OB	0.14	0.27	0.41	0.54	0.68	OD	0.14	0.27	0.41	0.54	0.68

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	15099.80	11792.07	1877.93	541.51	15.22	6.58	3.84	2.72	1.41	0.49
OB	15099.80	11792.07	1877.93	541.51	15.22	6.58	3.84	2.72	1.41	0.49
OC	15099.80	11792.07	1877.93	541.51	15.22	6.58	3.84	2.72	1.41	0.49
OD	15099.80	11792.07	1877.93	541.51	15.22	6.58	3.84	2.72	1.41	0.49

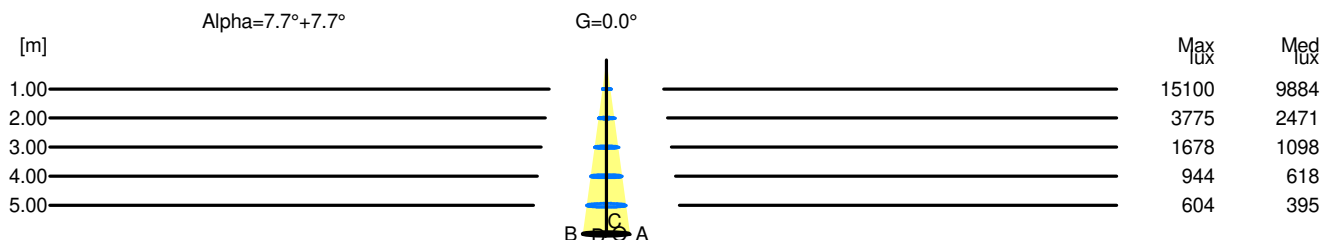

H[m]	D[m]	Max lux	Med lux	Alpha=7.7°+7.7°	G=0.0
1.00	0.27	15100	9884		
2.00	0.54	3775	2471		
3.00	0.81	1678	1098		
4.00	1.09	944	618		
5.00	1.36	604	395		